



MODEL :		TYPE
PROJECT :		
PREPARED BY :	DATE :	

## SERIES SPECIFICATIONS

Passive Infrared Wall Mount Occupancy Sensor, Decorator Series, 15A  
 120V, Single Pole  
 Automatic off after time delay expires with manual "off" option  
 Adjustable time delay off setting from 15 seconds to 30 minutes  
 Adjustable sensitivity settings  
 Built-in photocell increases energy savings  
 Decorator Wallplate Included



## CONSTRUCTION

Color  
White

Mounting  
Wall

Operation Temperature  
32°F to 131°F (0°C to 55°C)

Sensor Technology  
Passive Infrared

Time Delay  
15 Seconds to 30 Minutes

Light Level  
30 Lux-Daylight

Coverage 1  
180° 1200Ft.<sup>2</sup>

Coverage 2  
N/A

## ELECTRICAL SPECIFICATIONS

Voltage  
120 V AC

Poles  
Single

Hertz  
60 Hz

Horsepower  
1/4 HP

Time Delay  
15 Seconds to 30 Minutes

Load Rating 1  
Incandescent lamp: 800 Watt

Load Rating 2  
Flourescent lamp: 800 VA

Load Rating 3  
Motor Load: 1/4HP

Load Rating 4  
LED: 100W

APPLICATION AND PERFORMANCE SPECIFICATION INFORMATION IS SUBJECT TO CHANGE WITHOUT NOTIFICATION



404 NW ENTERPRISE DR. PORT ST. LUCIE, FL 34986 | 772.408.5213 | WWW.RPP-USA.COM



MODEL :		TYPE
PROJECT :		
PREPARED BY :	DATE :	

## CERTIFICATIONS/WARRANTY

Listing  
cULus Listed

Warranty  
Guaranteed for one year from the purchase date of the product, against mechanical defects in manufacturing.

## ORDERING INFORMATION

Part Number: VCOSWD15-WH

Box Qty : 10


Weight (Lbs) : 0.369

Carton Qty. : 40


IMS Code : 0277-7100

## COVERAGE PATTERN

### COVERAGE PATTERN

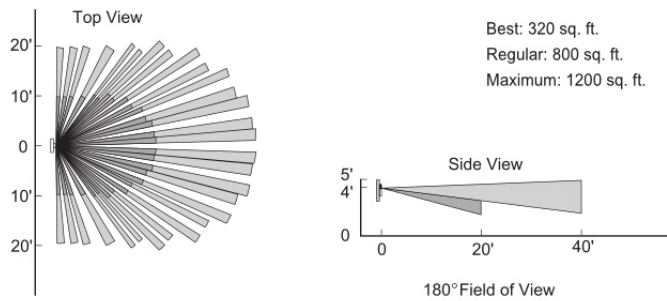

## WIRING DIAGRAM



APPLICATION AND PERFORMANCE SPECIFICATION INFORMATION IS SUBJECT TO CHANGE WITHOUT NOTIFICATION

